

**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>6</sup> :</b> <b>D04H 1/44</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 95/06769</b> <b>(43) International Publication Date:</b> 9 March 1995 (09.03.95)
<b>(21) International Application Number:</b> PCT/GB94/01856 <b>(22) International Filing Date:</b> 24 August 1994 (24.08.94) <b>(30) Priority Data:</b> 9317946.3 28 August 1993 (28.08.93) GB <b>(71) Applicant (for all designated States except US):</b> UNIVERSITY OF MANCHESTER INSTITUTE OF SCIENCE AND TECHNOLOGY [GB/GB]; P.O. Box 88, Manchester M60 1QD (GB). <b>(72) Inventors; and</b> <b>(75) Inventors/Applicants (for US only):</b> FOSTER, Peter [GB/GB]; University of Manchester Institute of Science and Technology, P.O. Box 88, Manchester M60 1QD (GB). PORAT, Itzhak [GB/GB]; University of Manchester Institute of Science and Technology, P.O. Box 88, Manchester M60 1QD (GB). <b>(74) Agents:</b> McNEIGHT, David, Leslie et al.; McNeight & Lawrence, Regent House, Heaton Lane, Stockport, Cheshire SK4 1BS (GB).		<b>(81) Designated States:</b> AT, AU, BB, BG, BR, BY, CA, CH, CZ, DE, DK, EE, ES, FI, GB, HU, JP, KP, KR, KZ, LK, LU, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SK, UA, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report.</i>
<b>(54) Title:</b> FIBRE BONDING  <b>(57) Abstract</b>  There is disclosed a method for bonding a fibre assembly comprising impinging a high temperature jet on the assembly to melt a melt component of the assembly to fuse fibres together.		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

- 1 -

### **FIBRE BONDING**

This invention relates to producing fibre assemblies and fabrics.

In addition to the age-old methods of making fabric, namely weaving and knitting, numerous so-called "non-woven" fabricating methods have been developed which produce fabrics more quickly and/or at lower cost, or with special properties. Some of these methods use heat to melt fusible fibre in a web to produce a so-called thermobonded fabric - such fabrics are produced using a heated roller which may have an embossed pattern which spot- or point- bonds the web so as to leave intervening unbonded areas so that the resulting material has a degree of textile flexibility, though the fabrics tend to be quite stiff nevertheless. Thermobonding is usually associated with high energy consumption.

For bonding without heat, methods have been developed using rows of chain stitches of warp threads (stitch bonding) or rows of quasi-chain stitches of fibres pulled by compound needles from the web (fleece knitting), needle punching, and hydro-entanglement, in which high pressure jets, usually of water, impinge the web at closely spaced apart locations and cause local entanglement which bonds the web into a fabric. Such fabrics tend to have relatively poor textile qualities in at least some regards - they may have better flexibility, but correspondingly less strength and dimensional stability than woven or knitted fabrics, and are often characterised by a marked tendency to pill.

The present invention provides methods for making improved non-woven fabrics.

The invention comprises a method for bonding a fibre assembly comprising impinging a high temperature jet on the assembly to melt a melt component of the assembly to fuse fibres together.

- 2 -

The jet may entangle as well as melt fibres and particularly interesting results are obtained when jets melt and entangle. It may be arranged that all jets melt and entangle to greater or lesser relative extents to produce fabrics or structures of various characteristics. It may be arranged that purely entangling jets are present with purely melting jets or with jets that both melt and entangle.

The melt component may be a thermoplastic fibre - by "fibre" as used herein, unless otherwise indicated, is meant continuous filament or staple fibre. Two thermoplastic fibres may be used together, one of which, by virtue of its lower melting temperature, comprising a melt fibre, the other a structure fibre.

A thermoplastic fibre may be the sole constituent of the assembly and molten portions of it fuse other portions together.

A melt fibre may be a single component fibre or may be a bicomponent fibre having at least one thermoplastic component.

A thermoplastic fibre may however be one of at least two components of the assembly, the other of which may or may not be thermoplastic, and may melt to bond other or the other component fibre.

The jet may be a steam jet, and may be a super- heated steam jet.

The invention also comprises a method for making a fabric comprising bonding a fibre web using a method as described.

A plurality of spaced-apart jets may act on the web; the jets may be spaced apart in two-dimensional array. The jets may be apertures in a platen backed by a superheated steam

- 3 -

plenum chamber, or may be apertures in a rotary cylinder.

The jets may be spaced apart by distances of the order of two or three millimetres.

The fibre assembly may be backed by a permeable support, which may comprise a perforate belt or wire, which may wrap around a rotary cylinder for example or which may constitute a conveyor for the web.

The invention also comprises a bonded fibre assembly and a bonded fabric produced by a method as described.

The invention also comprises apparatus for bonding a fibre assembly comprising high temperature jet means adapted to impinge a fibre assembly in such manner as to melt a melt component of the assembly to fuse fibres together.

The high temperature jet means may comprise steam, in particular superheated steam jet means.

The apparatus may be adapted for making a fabric comprising fibre web support means adapted to support a fibre web for impingement by said high temperature jet means. Said support means may be permeable, and may comprise a perforate belt or wire.

Said steam jet means may comprise an apertured platen, which may be backed by a plenum chamber. Said support means may, on the other hand, comprise an apertured roller.

The steam jet means may comprise steam jets arranged in an array with a spacing of the order of 2 or 3 mm.

- 4 -

The invention also comprises a fibre assembly or fabric produced by any such apparatus. The invention also comprises a fabric comprising a web of textile fibre having spaced apart bonding points where the fibres are less densely arranged than in the rest of the web and have interfibre melt bonds.

Embodiments of fabrics and apparatus and methods for producing fabrics according to the invention will now be described with reference to the accompanying drawings, in which :-

- Figure 1 is a diagrammatic section through steam jet means of the invention acting on a fibre web;
- Figure 2 is a diagrammatic side elevation of fabric bonding plant including steam jet means according to the invention;
- Figure 3 is a diagrammatic cross-section through another fibre bonding plant according to the invention;
- Figure 4 is a view of a section of a surface of a bonded web according to the invention;
- Figure 5 is a view like Figure 4 to a larger scale;
- Figure 6 is a view of a single bond point of a web as depicted in Figures 4 and 5;
- Figure 7 is a view of bonded fibres in a bond point as illustrated in Figure 6;

- 5 -

and Figure 8 is a view like Figure 7 of a different fabric according to the invention.

The drawings illustrate methods and apparatus for bonding a fibre assembly and in particular a fibre web 11 to form a bonded fabric, and bonded fabrics formed thereby.

Figures 1 to 3 illustrate apparatus and methods of using it in which high temperature superheated steam jets 12 impinge on the fibre web 11 to melt a melt component fibre thereof to fuse fibres together.

In each case discussed herein the melt component is a thermoplastic fibre. It must, however, be pointed out that it would be possible to incorporate a melt component in some other way, such, for example, as in powder or particulate form. However, using a melt component fibre means that any unmelted melt component remains as part of the fibre make-up of the fabric and this suggests that incorporation of melt component in fibre form is most efficient.

As mentioned above, hydroentanglement has been used as a means of making a fabric from a web or fleece of fibre, and the jets contemplated for use in the present invention can correspond substantially to those used in hydroentanglement in regard to size, spacing, cross-sectional area, velocity and so forth, with the essential difference that they are hot enough to melt at least a melt component of the fibre assembly or web to fuse fibres together.

Figures 1 and 2 illustrate an arrangement in which a plenum chamber 21 backs a platen 22 with jet apertures 23 impinging the web 11 supported on a perforate backing mesh or wire 24. In Figure 2, it can be seen that the mesh or wire 24 constitutes an endless belt running over rollers 25 and beneath the platen 22, the plenum chamber 21 of which is supplied with superheated steam from a steam generator 26.

- 6 -

A support bed 27 (which may also be perforated to allow escape of steam) is provided beneath the platen 22 to support the mesh or wire 24.

The platen 22 can be raised from and lowered on to the top of the web 11 which can be moved intermittently, a platen-length at a time, when the platen is raised, steam being applied when the travel is temporarily arrested and the platen lowered.

A continuous processing arrangement is illustrated in Figure 3 in which a perforated roller 32 with an interior plenum chamber 31 is used instead of the platen 21 of Figures 1 and 2. The web 11 is guided around and pressed against the platen 32 by a perforate belt 34 running on rollers 35. The jets of the roller 32 are blanked off except where the web 11 is wrapped.

In both embodiments, the treatment zone is encased in suitable jacket means, not shown, to prevent dangerous escape of high pressure, superheated steam and to provide for heat and possibly water recovery. Appropriate controls and safety measures will also be provided, as well as the necessary fibre preparation and web-laying equipment, fibre take-up and so forth.

Figure 4 shows a surface, somewhat enlarged, of a bonded web produced on apparatus as described with reference to Figures 1 to 3. "Spots" 41 are noticeable in a configuration corresponding to the array of jets in the apparatus. Figures 5 and 6 show the spots 41 to larger scales - some bonding is evident more particularly in Figures 6. Figure 7 is a further enlargement of a fibre region within a spot 41 in which melt bonds are clearly visible as globules 42. This is typical of bonding with distinct melt and structure components.

Figures 8, however, which is a view to a somewhat higher magnification even than Figure 7, illustrates a bond typical of a single component fabric where the individual fibres 81 become tacky and form bonds by means of fibrils 82 bridging them. Of course, both types of bond may be found within a multicomponent fabric according to the processing temperatures.



- 7 -

In conventional hydroentanglement, instead of spot bonding, jets can be traversed relatively to the web to form continuous line bonds in various patterns. The equivalent would be possible also with methods according to the invention.

A variety of fabric specifications may also be generated by using different temperatures and pressures, patterned backing elements, patterns and sizes of jet orifices and different degrees of constricting the fibres in the web against movement under the jets. The fibre may be continuous filament or staple fibre or a mixture of the two, and a melt component may be provided as one component of a bicomponent fibre.

The superheated steam (or other high temperature fluid) may contain additives which may help or serve to effect thermal bonding between fibres or to condense a treatment substance on to the fibres, and indeed many variations on the basic principles hereinabove disclosed will be found useful.

Typical fabrics produced by the method of the invention have tenacities (in Cn/tex) of about 1.3 which compares favourably with thermally bonded fabrics (about 1.2) and very favourably with conventionally hydro- entangled fabrics (about 0.8). The flexural rigidity of a typical fabric of the invention is about 1200 mg.cm, which is intermediate between a thermally bonded fabric (about 1700 mg.cm) and a hydroentangled fabric (about 800 mg.cm). However, as noted, the fabric of the invention can be produced to different specifications, and particularly at different strengths and flexural rigidities without the one necessarily having to be traded off against the other.

**CLAIMS**

1. A method for bonding a fibre assembly comprising impinging a high temperature jet on the assembly to melt a melt component of the assembly to fuse fibres together.
2. A method according to claim 1, in which the melt component is a thermoplastic fibre.
3. A method according to claim 2, in which the thermoplastic fibre is the sole constituent of the assembly and molten portions of it fuse other portions together.
4. A method according to claim 2, in which the thermoplastic fibre is one of at least two components and melts to bond other fibre components.
5. A method according to any one of claims 1 to 4, in which the jet is a steam jet.
6. A method according to claim 5, in which the steam jet is a superheated steam jet.
7. A method for making a fabric comprising bonding a fibre web using a method according to any one of claims 1 to 6.
8. A method according to claim 7, in which a plurality of spaced-apart jets acts on the web.
9. A method according to claim 8, in which the jets are spaced apart in two-dimensional array.

- 9 -

10. A method according to claim 9, in which the jets are apertures in a platen backed by a superheated steam plenum chamber.
11. A method according to claim 9, in which the jets are apertures in a rotary cylinder.
12. A method according to any one of claims 7 to 11, in which the jets are spaced apart by distances of the order of two or three millimetres.
13. A method according to any one of claims 1 to 12, in which the jets entangle as well as melt fibre.
14. A method according to any one of claims 1 to 13, in which the fibre assembly is backed by a permeable support.
15. A method according to claim 14, in which the permeable support comprises a perforate belt or wire.
16. A method according to claim 15, in which the belt or wire wraps around a rotary cylinder.
17. A bonded fibre assembly produced by a method according to any one of claims 1 to 16.
18. A bonded fabric produced by a method according to any one of claims 1 to 16.
19. Apparatus for bonding a fibre assembly comprising high temperature jet means adapted to impinge a fibre assembly in such manner as to melt a melt component of the assembly to fuse fibres together.

- 10 -




20. Apparatus according to claim 19, in which the high temperature jet means comprise steam jet means.
21. Apparatus according to claim 20, in which the high temperature jet means comprise superheated steam jet means.
22. Apparatus according to any one of claims 19 to 21, adapted for making a fabric comprising fibre web support means adapted to support a fibre web for impingement by said high temperature jet means.
23. Apparatus according to claim 22, in which said support means are permeable.
24. Apparatus according to claim 23, in which said support comprises a perforate belt or wire.
25. Apparatus according to any one of claims 19 to 24, in which the steam jet means comprise an apertured platen.
26. Apparatus according to claim 25, in which the apertured platen is backed by a plenum chamber.
27. Apparatus according to claim 25, in which the steam jet means comprise an apertured roller.
28. Apparatus according to any one of claims 19 to 27, in which the steam jet means comprise steam jets arranged in an array with a spacing of the order of 2 or 3 mm.

- 11 -

29. A fibre assembly or fabric produced by apparatus according to any one of claims 19 to 28.

30. A fabric comprising a web of textile fibres having spaced apart bonding points where the fibres are less densely arranged than in the rest of the web and have interfibre melt bonds.

1/2

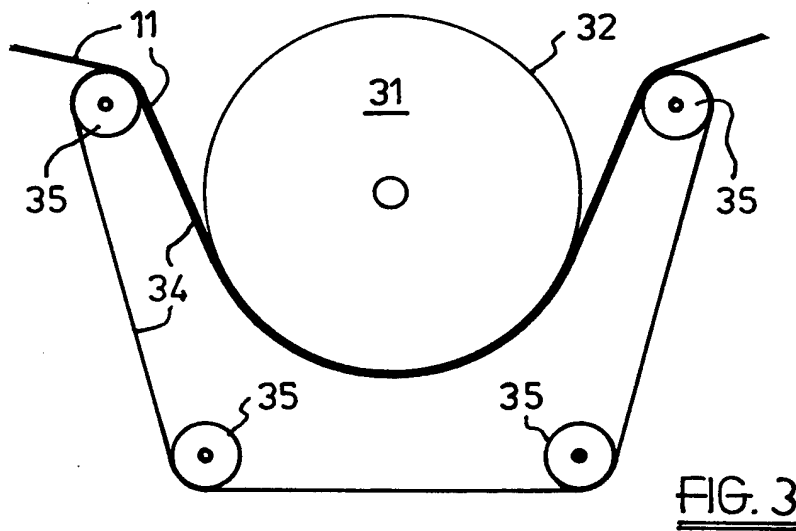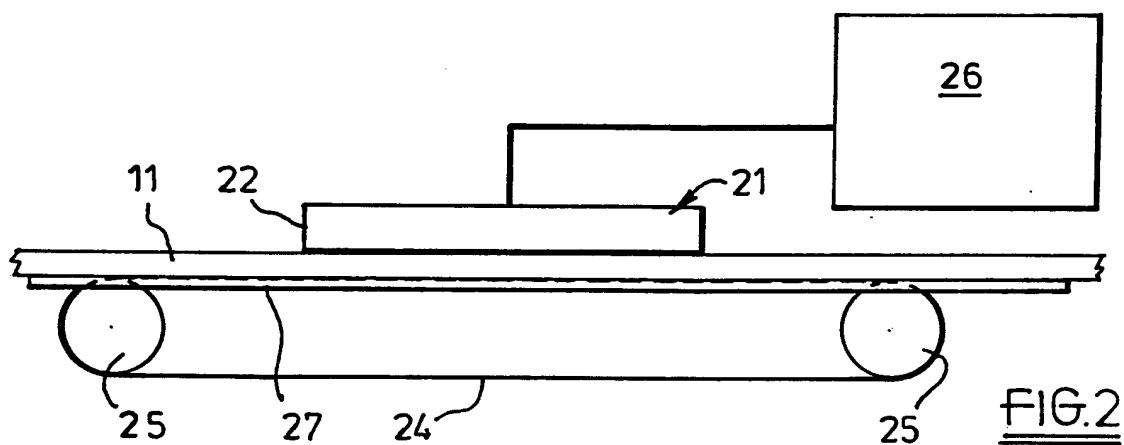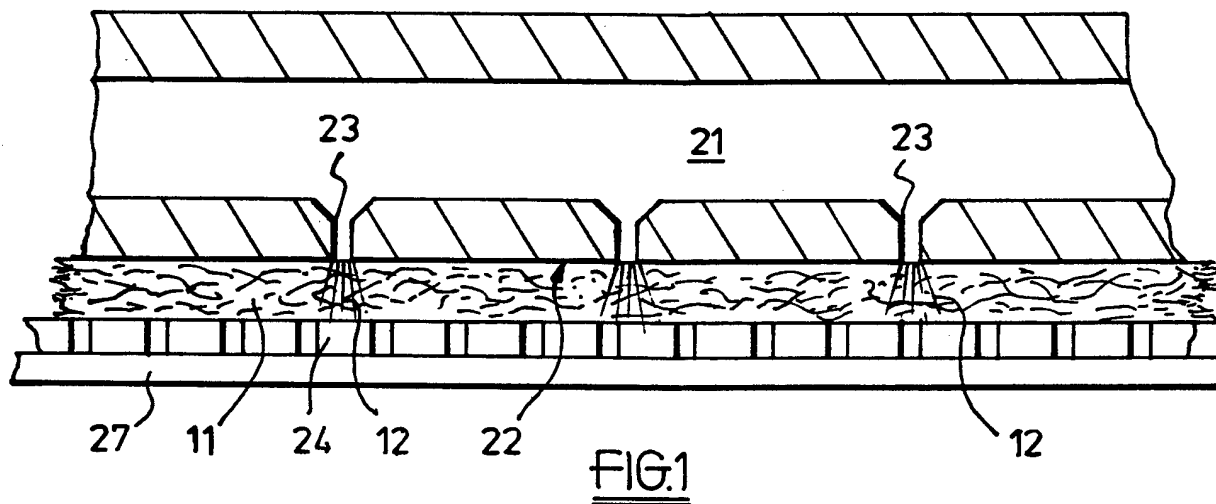

2/2

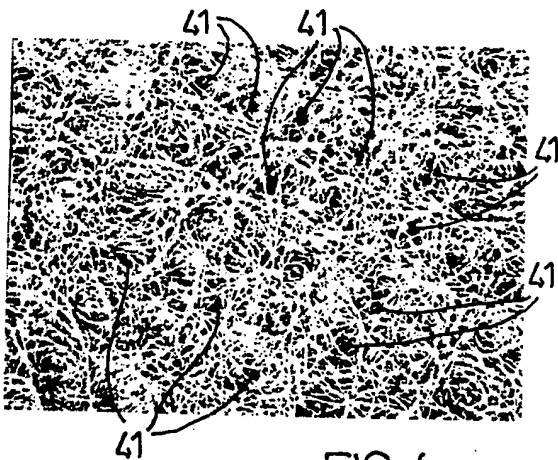


FIG.4

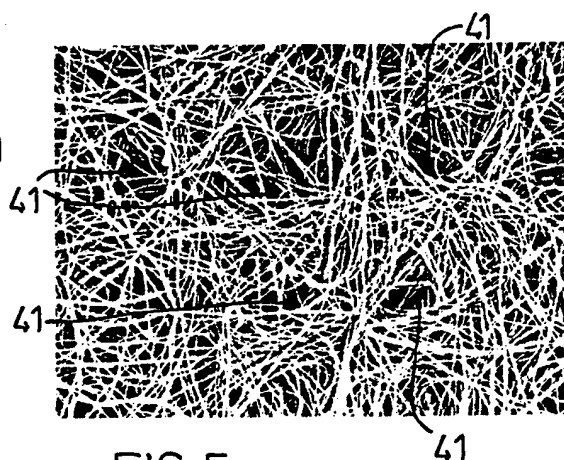


FIG.5

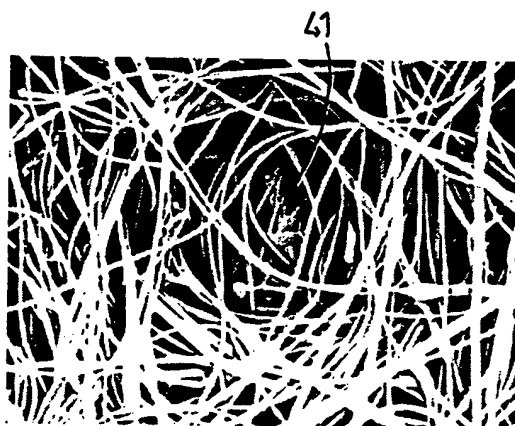


FIG.6

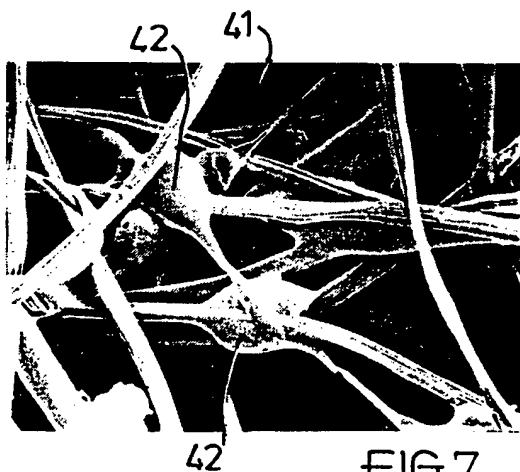


FIG.7

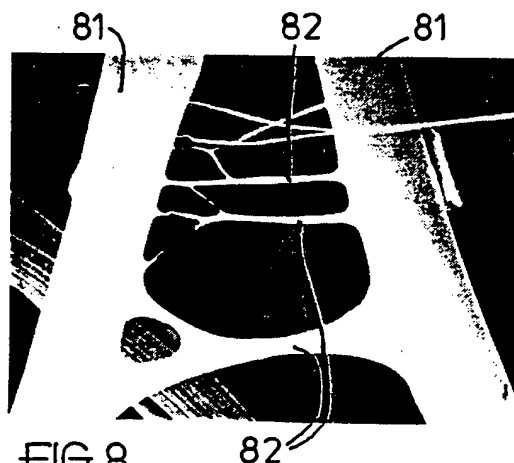


FIG.8

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 94/01856

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 D04H1/44

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 D04H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	US,A,3 322 584 (WELLIN BERGER) 30 May 1967  see the whole document ---	1-6, 19 7-18, 20-30
X A	US,A,3 192 560 (HUFFMAN) 6 July 1965  see the whole document ---	1, 19 2-18, 20-30
A	US,A,3 353 225 (WILLIAM C.DODSON) 21 November 1967 see the whole document ---	1-29
A	US,A,3 458 905 (WILLIAM C. DODSON) 5 August 1969 see claims; examples -----	1-29

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

5 December 1994

Date of mailing of the international search report

20.12.94

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

DURAND, F



# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 94/01856

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-3322584		FR-A- 1462423 GB-A- 1045590	
-----		-----	
US-A-3192560		NONE	
-----		-----	
US-A-3353225		NONE	
-----		-----	
US-A-3458905	05-08-69	NONE	
-----		-----	

**DERWENT-ACC-NO:** 1995-115480

**DERWENT-WEEK:** 199841

*COPYRIGHT 2009 DERWENT INFORMATION LTD*

**TITLE:** Method and appts. for producing non woven fibre assemblies where differing types of continuous filament or staple yarns are laid as web and impinged by high temp. jet to fuse the fibres together.

**INVENTOR:** FOSTER P; PORAT I

**PATENT-ASSIGNEE:** UNIV MANCHESTER INST SCI & TEC  
[UYMAN]

**PRIORITY-DATA:** 1993GB-017946 (August 28, 1993)

**PATENT-FAMILY:**

<b>PUB-NO</b>	<b>PUB-DATE</b>	<b>LANGUAGE</b>
WO 9506769 A1	March 9, 1995	EN
AU 9475029 A	March 22, 1995	EN
EP 719355 A1	July 3, 1996	EN
EP 719355 B1	July 29, 1998	EN
DE 69412106 E	September 3, 1998	DE

**DESIGNATED-STATES:** AT AU BB BG BR BY CA CH CZ DE DK  
EE ES FI GB HU JP KP KR KZ LK LU  
MG MN MW NL NO NZ PL PT RO RU SD  
SE SK UA US UZ VN AT BE CH DE DK  
ES FR GB GR IE IT LU MC NL OA PT  
SE BE CH DE ES FR GB IT LI NL BE  
CH DE ES FR G B IT LI NL

**APPLICATION-DATA:**

<b>PUB-NO</b>	<b>APPL-DESCRIPTOR</b>	<b>APPL-NO</b>	<b>APPL-DATE</b>
WO1995006769A1	N/A	1994WO-GB01856	August 24, 1994
AU 9475029A	N/A	1994AU-075029	August 24, 1994
DE 69412106E	N/A	1994DE-612106	August 24, 1994
EP 719355A1	N/A	1994EP-924925	August 24, 1994
EP 719355B1	N/A	1994EP-924925	August 24, 1994
EP 719355A1	N/A	1994WO-GB01856	August 24, 1994
EP 719355B1	N/A	1994WO-GB01856	August 24, 1994
DE 69412106E	Based on	1994WO-GB01856	August 24, 1994

**INT-CL-CURRENT:**

<b>TYPE</b>	<b>IPC DATE</b>
CIPS	D04H1/44 20060101
CIPS	D04H1/54 20060101

**ABSTRACTED-PUB-NO:** WO 9506769 A1

**BASIC-ABSTRACT:**

Bonding a fibre assembly comprises impinging a high temp. jet on the assembly to melt melt components of the assembly to fuse the fibres together. The melt component is a thermoplastic fibre, and the high temp. jet is steam or superheated steam jets.

Also claimed are (i) a method for making a fabric; (ii) a bonded fibre assembly; (iii) a bonded fabric; and an appts. for bonding a fibre assembly.

USE - Used for prodn. of a non woven fabric.

ADVANTAGE - Produces a non woven fabric with greater flexibility, textile strength and dimensional stability, with reduced tendency to pill.

**CHOSEN-DRAWING:** Dwg.1/8

**TITLE-TERMS:** METHOD APPARATUS PRODUCE NON WOVEN  
FIBRE ASSEMBLE DIFFER TYPE  
CONTINUOUS FILAMENT STAPLE YARN LAY  
WEB IMPINGE HIGH TEMPERATURE JET  
FUSE

**DERWENT-CLASS:** A35 F04

**CPI-CODES:** A11-C05A; A12-S05G; A12-S05L; F02-C01;  
F02-C02B;

**ENHANCED-POLYMER-INDEXING:** Polymer Index [1.1]  
 017 ; P0000; S9999 S1149  
 S1070; S9999 S1092  
 S1070; S9999 S1183 S1161  
 S1070;

Polymer Index [1.2]  
 017 ; ND05; ND07; N9999  
 N6020 N6008; N9999  
 N5721\*R; N9999 N6166;  
 K9461; B9999 B4035 B3930  
 B3838 B3747; B9999 B4171  
 B4091 B3838 B3747; B9999  
 B3758\*R B3747; B9999  
 B3769 B3758 B3747; J9999  
 J2915\*R; N9999 N6348  
 N6337; K9416;

Polymer Index [2.1]  
 017 ; H0317; S9999  
 S1387; S9999 S1070\*R;  
 S9999 S1092 S1070; S9999  
 S1149 S1070; S9999 S1183  
 S1161 S1070;

Polymer Index [2.2]  
 017 ; ND05; ND07; N9999  
 N6020 N6008; N9999  
 N5721\*R; N9999 N6166;  
 K9461; B9999 B4035 B3930  
 B3838 B3747; B9999 B4171  
 B4091 B3838 B3747; B9999  
 B3758\*R B3747; B9999  
 B3769 B3758 B3747; J9999  
 J2915\*R; N9999 N6348  
 N6337; K9416;

Polymer Index [2.3]

017 ; N9999 N6202 N6177;

**SECONDARY-ACC-NO:**

**CPI Secondary Accession Numbers:** 1995-052699